


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
INSULATOR	PTFE / TEFLON	N/A
CENTER CONTACT / PIN	BRASS	GOLD PLATED
FERRULE	BRASS	NICKEL PLATED
WASHER	BRASS	NICKEL PLATED
NUT	BRASS	NICKEL PLATED
O-RING GASKET	SILICON RUBBER	N/A

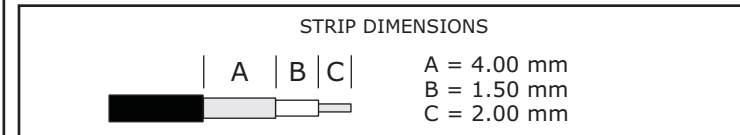

TERMINATION

CENTRE CONTACT : SOLDER

FERRULE : 3.25mm A/F Crimp Hex

COAX CABLE ASSEMBLY

1. STRIP CABLE TO THE DIMENSIONS SHOWN ABOVE TAKING CARE NOT TO CUT INTO THE BRAID OR DIELECTRIC BEYOND THE REQUIRED POINTS.
2. CAREFULLY PLACE A PIECE OF HEAT SHRINK SLEEVE THEN FERRULE OVER THE CABLE JACKET & FAN THE BRAID OUTWARD SO THE DIELECTRIC IS EXPOSED.

SLIDE THE CABLE INTO THE BACK OF THE CONNECTOR & LOCATE THE CENTER CONDUCTOR INTO THE SOLDER CUP. MAKE SURE THE CONDUCTOR IS SEATED CORRECTLY AND THAT THERE IS NO DEBRIS OR LOOSE STRANDS THAT COULD CAUSE A SHORT AND SOLDER THE CONDUCTOR TO THE CONTACT.

RECOMMENDED 2:1 RATIO 4.8mm x 20mm

3. FINALLY SLIDE THE FERRULE DOWN THE CABLE AND OVER THE BRAID MAKING SURE IT SITS TIGHT AGAINST THE CONNECTOR BODY THEN CRIMP USING A 3.25MM A/F HEX, SLIDE HEAT SHRINK INTO PLACE AND SHRINK.

ISSUE:	A	TITLE:	N Type Crimp Bulkhead Jack Cable Group - RG174
DIM:	mm		
SCALE:	2 / 1		
PAGE:	1 OF 1	PART No:	036.222.043
DATE:	12/05/09		