

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
INSULATOR	PTFE / TEFLON	N/A
CENTER CONTACT / PIN	BRASS	GOLD PLATED
FERRULE	BRASS	NICKEL PLATED
WASHER	BRASS	NICKEL PLATED
NUT	BRASS	NICKEL PLATED
O-RING GASKET	SILICON RUBBER	N/A

#### STRIP DIMENSIONS



#### TERMINATION


CENTRE CONTACT : SOLDER

FERRULE : 3.25mm A/F Crimp Hex


#### COAX CABLE ASSEMBLY

1. STRIP CABLE TO THE DIMENSIONS SHOWN ABOVE TAKING CARE NOT TO CUT INTO THE BRAID OR DIELECTRIC BEYOND THE REQUIRED POINTS.
2. CAREFULLY PLACE A PIECE OF HEAT SHRINK SLEEVE THEN FERRULE OVER THE CABLE JACKET & FAN THE BRAID OUTWARD SO THE DIELECTRIC IS EXPOSED.

SLIDE THE CABLE INTO THE BACK OF THE CONNECTOR & LOCATE THE CENTER CONDUCTOR INTO THE SOLDER CUP. MAKE SURE THE CONDUCTOR IS SEATED CORRECTLY AND THAT THERE IS NO DEBRIS OR LOOSE STRANDS THAT COULD CAUSE A SHORT AND SOLDER THE CONDUCTOR TO THE CONTACT.

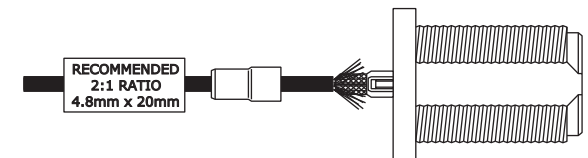

3. FINALLY SLIDE THE FERRULE DOWN THE CABLE AND OVER THE BRAID MAKING SURE IT SITS TIGHT AGAINST THE CONNECTOR BODY THEN CRIMP USING A 3.25MM A/F HEX, SLIDE HEAT SHRINK INTO PLACE AND SHRINK.

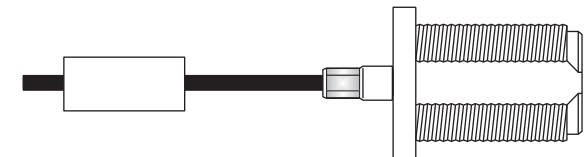

ISSUE:	A	TITLE:	N Type Crimp Bulkhead Jack Cable Group - RG316 D
DIM:	mm		
SCALE:	2 / 1		
PAGE:	1 OF 1	PART No:	036.222.053
DATE:	11/05/09		