


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
INSULATOR	PTFE / TEFLON	N/A
CENTER CONTACT / PIN	BRASS	GOLD PLATED
FERRULE	BRASS	NICKEL PLATED
ROTATING NUT	BRASS	NICKEL PLATED
NUT RETAINING WASHER	SK-5	NONE
MATING GASKET	SILICON RUBBER	N/A

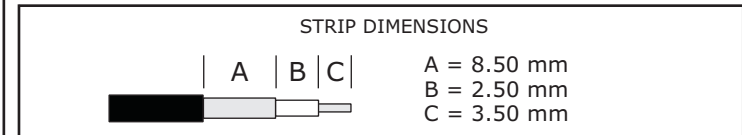

TERMINATION

CENTRE CONTACT : 2.99 mm A/F Crimp Hex or Solder
FERRULE : 10.9 mm A/F Crimp Hex

COAX CABLE ASSEMBLY

- STRIP CABLE TO THE DIMENSIONS SHOWN ABOVE TAKING CARE NOT TO CUT INTO THE BRAID OR DIELECTRIC BEYOND THE REQUIRED POINTS.
- CAREFULLY PLACE A PIECE OF HEAT SHRINK SLEEVE THEN FERRULE OVER THE CABLE JACKET AND CRIMP THE CONTACT USING A 2.99MM A/F HEX ON TO THE CENTER CONDUCTOR OF THE CABLE.

RECOMMENDED 2:1 RATIO 19 mm x 45 mm

- CAREFULLY FAN THE BRAID OUTWARDS SO THAT WHEN SUB ASSEMBLY IS INSERTED INTO THE CONNECTOR BODY AND CENTER CONTACT IS CORRECTLY SEATED IN POSITION ALL THE BRAID LAYS EXTERNAL TO THE CONNECTOR.

- FINALLY SLIDE THE FERRULE DOWN CABLE AND OVER THE BRAID MAKING SURE IT SITS TIGHT AGAINST THE CONNECTOR BODY THEN CRIMP USING A 10.90MM A/F HEX, SLIDE HEAT SHRINK INTO PLACE AND SHRINK.