


# CABLE ASSEMBLY DESCRIPTION:

## MCX Crimp Plug to Open End - RG316/U @ 250mm

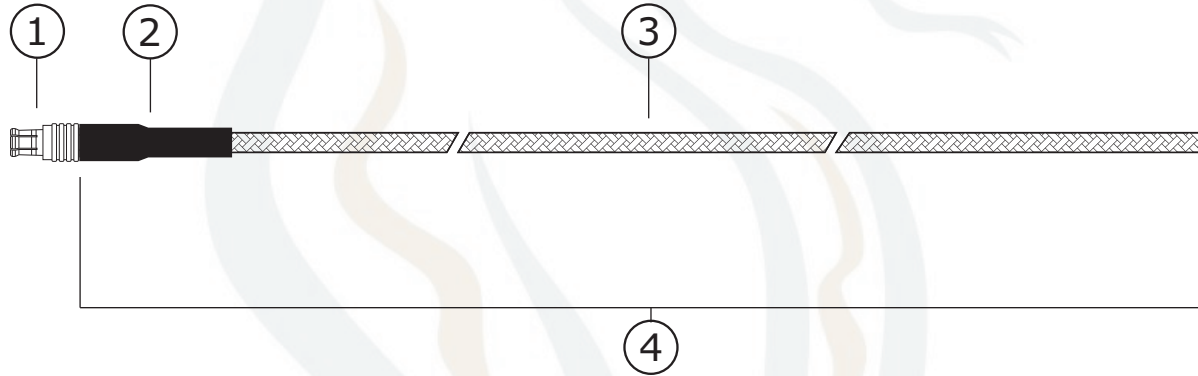

PRODUCTION APPROVED <b>R.L.</b> 03 FEB 10	TOLERANCES UNLESS OTHERWISE STATED  <b>+/- 3.0mm</b>	NOTES:  1. CONNECTOR - 206.111.044 2. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 3. COAX CABLE - RG316 /U 4. LENGTH REFERENCE - BACK OF CONNECTOR BODY TO END OF CABLE  5. N/A 6. N/A 7. N/A	<b>ADDITIONAL CUSTOMER REQUIREMENTS/NOTES:</b>  A.  B.  C.
CHECKED <b>R.L.</b> 03 FEB 10	DIMENSIONS UNLESS OTHERWISE STATED  <b>mm</b>		<b>CUSTOMER APPROVAL.</b>  SIGNED: _____ DATE: _____
DRAWN ISSUE 1 <b>J.L.</b> 02 FEB 10	SCALE  <b>N.T.S.</b>		DRAWING NUMBER  <b>511.201.50Z.023F</b>
<b>cobra electronics limited</b> custom cable assembly solutions		THIS DOCUMENT AND INFORMATION CONTAINED HEREIN MAY NOT BE COPIED, USED OR DISCLOSED BY WHOLE OR IN PART EXCEPT WITH THE WRITTEN PRIOR CONSENT OF COBRA ELECTRONICS LIMITED.	COBRA ELECTRONICS LIMITED. 2010 1 GREENACRES, BORDON HAMPSHIRE. GU35 0EX TEL: +44 (0) 1420 479830 FAX: +44 (0) 1420 479860