



CABLE ASSEMBLY DESCRIPTION:

SMA Crimp Plug to SMA Crimp Plug - RG 174A/U @ 1000mm

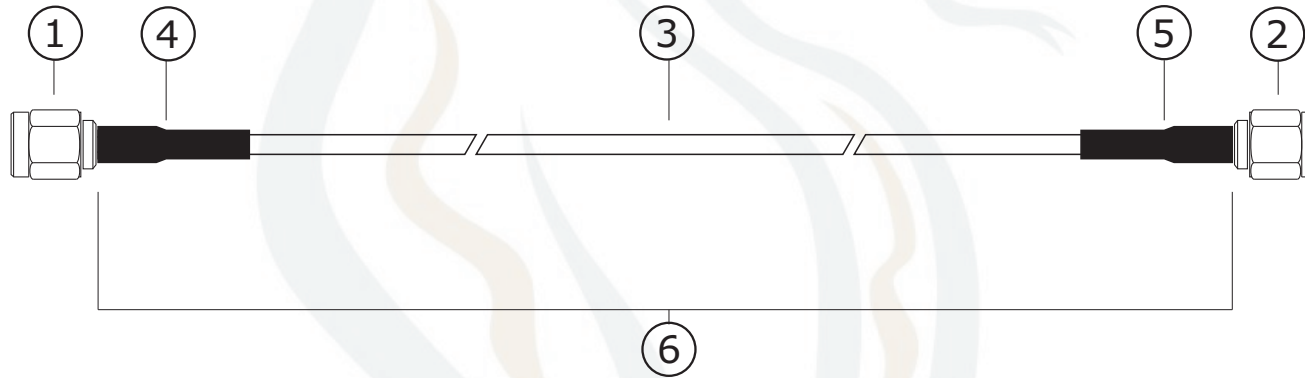

PRODUCTION APPROVED R.L. 10 JAN 10	TOLERANCES UNLESS OTHERWISE STATED +/- 3.0mm	NOTES: 1. CONNECTOR - 106.121.044 2. CONNECTOR - 106.121.044 3. COAX CABLE - RG174 A/U 4. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 5. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 6. LENGTH REFERENCE - BACK OF CONNECTOR BODY TO BACK OF CONNECTOR BODY 7. N/A	ADDITIONAL CUSTOMER REQUIREMENTS/NOTES: A. B. C.
CHECKED R.L. 10 JAN 10	DIMENSIONS UNLESS OTHERWISE STATED mm		CUSTOMER APPROVAL. SIGNED: _____ DATE: _____
DRAWN ISSUE 1 J.L. 09 JAN 10	SCALE N.T.S.		
		THIS DOCUMENT AND INFORMATION CONTAINED HEREIN MAY NOT BE COPIED, USED OR DISCLOSED BY WHOLE OR IN PART EXCEPT WITH THE WRITTEN PRIOR CONSENT OF COBRA ELECTRONICS LIMITED.	DRAWING NUMBER 515.101.101.010B

© COBRA ELECTRONICS LIMITED. 2010
 1 GREENACRES, BORDON HAMPSHIRE. GU35 0EX
 TEL: +44 (0) 1420 479830
 FAX: +44 (0) 1420 479860