


CABLE ASSEMBLY DESCRIPTION:

SMA Crimp Plug to SMA Crimp Plug - RG 174A/U @ 250mm

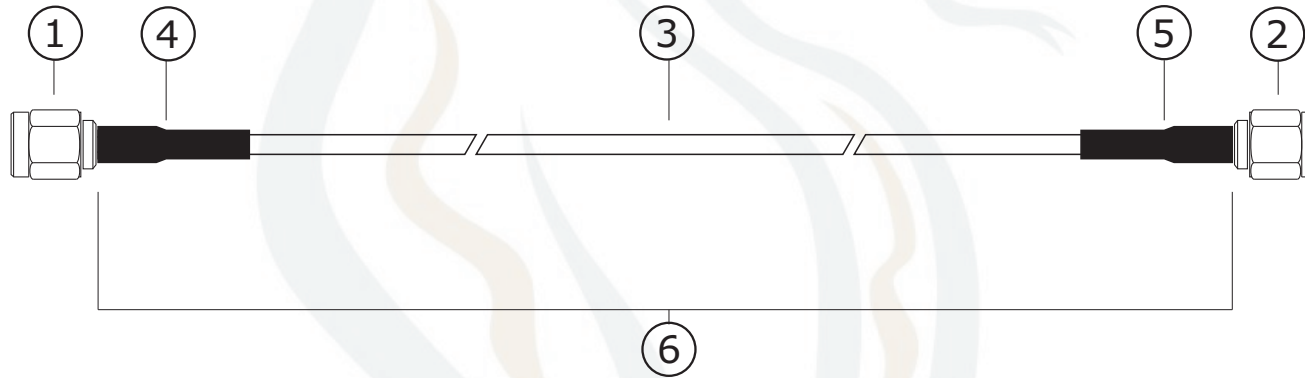

PRODUCTION APPROVED R.L. 10 JAN 10	TOLERANCES UNLESS OTHERWISE STATED +/- 3.0mm	NOTES: 1. CONNECTOR - 106.121.044 2. CONNECTOR - 106.121.044 3. COAX CABLE - RG174 A/U 4. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 5. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 6. LENGTH REFERENCE - BACK OF CONNECTOR BODY TO BACK OF CONNECTOR BODY 7. N/A	ADDITIONAL CUSTOMER REQUIREMENTS/NOTES: A. B. C.
CHECKED R.L. 10 JAN 10	DIMENSIONS UNLESS OTHERWISE STATED mm		CUSTOMER APPROVAL. SIGNED: _____ DATE: _____
DRAWN ISSUE 1 J.L. 09 JAN 10	SCALE N.T.S.		DRAWING NUMBER 511.101.101.010B