




CABLE ASSEMBLY DESCRIPTION:

SMA Crimp Plug to SMA Crimp Plug - RG316/U @ 500mm

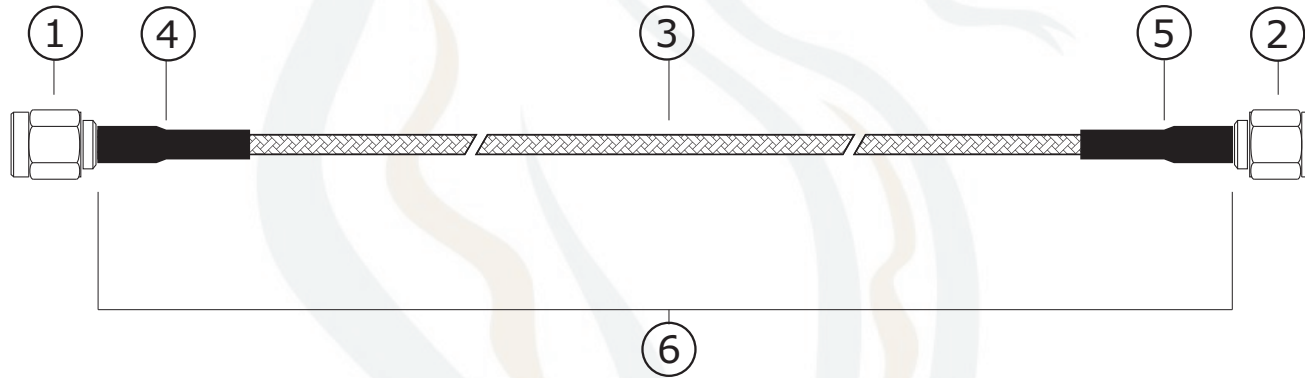

PRODUCTION APPROVED R.L. 12 JAN 10	TOLERANCES UNLESS OTHERWISE STATED +/- 3.0mm	NOTES: 1. CONNECTOR - 106.121.044 2. CONNECTOR - 106.121.044 3. COAX CABLE - RG316 /U 4. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 5. BLACK HEAT SHRINK SLEEVE - 4.8mm x 20mm LENGTH 6. LENGTH REFERENCE - BACK OF CONNECTOR BODY TO BACK OF CONNECTOR BODY 7. N/A	ADDITIONAL CUSTOMER REQUIREMENTS/NOTES: A. B. C.
CHECKED R.L. 12 JAN 10	DIMENSIONS UNLESS OTHERWISE STATED mm		CUSTOMER APPROVAL. SIGNED: _____ DATE: _____
DRAWN ISSUE 1 J.L. 10 JAN 10	SCALE N.T.S.		DRAWING NUMBER 513.101.101.023B
 cobra electronics limited custom cable assembly solutions		THIS DOCUMENT AND INFORMATION CONTAINED HEREIN MAY NOT BE COPIED, USED OR DISCLOSED BY WHOLE OR IN PART EXCEPT WITH THE WRITTEN PRIOR CONSENT OF COBRA ELECTRONICS LIMITED.	 COBRA ELECTRONICS LIMITED.2010 1 GREENACRES, BORDON HAMPSHIRE. GU35 0EX TEL: +44 (0) 1420 479830 FAX: +44 (0) 1420 479860